




CUSTOMER SPECIFICATION



202 CDL-E STOLLE LOE X1

DIMENSIONS IN INCHES AND/OR MILLIMETERS UNLESS STATED OTHERWISE. REFERENCE (REF) DIMENSIONS ARE FOR INFORMATION ONLY.

	INCHES	METRICS
MATERIAL GAUGE	.0082	0,208
BUCKLE	90 PSI (MIN)	620 kPa (MIN)
VENT	80 PSI (MIN)	550 kPa (MIN)
SPONGINESS (PER 15 ENDS)	.039 (MAX)	1,00 MAX

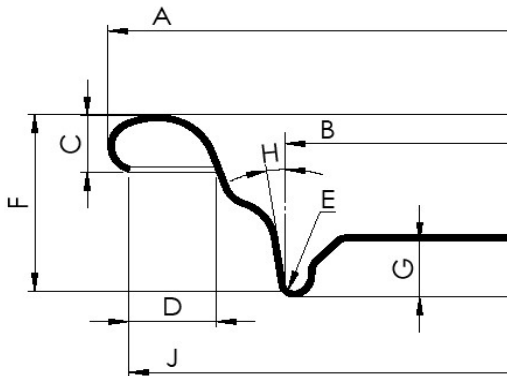

A CURL DIAMETER	2.335 ± .010	59,30 ± .0,25
B COUNTERSINK DIAMETER	1.867 (REF)	47,42 (REF)
C CURL HEIGHT	.081 ± .006	2,07 ± 0,15
E COUNTERSINK RADIUS	.009 (REF)	0,23 (REF)
F COUNTERSINK DEPTH	.250 ± .006	6,35 ± 0,15
G PANEL HEIGHT	.080 (REF)	2,04 (REF)
J INSIDE CURL DIAMETER	2.270 MIN	57,66 MIN

COMPOUND SEE COMPOUND SPECIFICATION

ENDS IDENTIFICATION SEE ID SPECIFICATION

CS NAME

202-CDL-E-STOLLE-LOE

ID

CUSTSPEC000014

REVISION

A

ISSUE DATE

22 June 2022